

## **WO9429981**

Publication Title:

**NON-CONTINUOUS TRANSMISSION FOR SEAMLESS HANDOVER IN DS-CDMA SYSTEMS**

Abstract:

Abstract of WO9429981

Introduction of discontinuous transmission in CDMA communications techniques is achieved by using a lower spreading ratio, whereby the spread information only fills an information part of a frame in a compressed mode, leaving an idle part of the frame in which to perform other functions, such as evaluation of other frequencies and execution of seamless handover between frequencies.

Data supplied from the esp@cenet database - Worldwide

-----  
Courtesy of <http://v3.espacenet.com>

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup>:</b> <b>H04J 13/00, H04Q 7/04</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 94/29981</b> <b>(43) International Publication Date:</b> 22 December 1994 (22.12.94)
<b>(21) International Application Number:</b> PCT/SE94/00583 <b>(22) International Filing Date:</b> 14 June 1994 (14.06.94)  <b>(30) Priority Data:</b> 075,892                      14 June 1993 (14.06.93)                      US  <b>(71) Applicant:</b> TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE).  <b>(72) Inventors:</b> GRIMLUND, Olof, Erik; Tunnländsvägen 45 2trp, S-161 44 Bromma (SE). EWERBRING, Lars-Magnus; Norr Mälarstrand 70, S-112 35 Stockholm (SE). WILLARS, Per, Hans, Åke; Rindögatan 19 8trp, S-115 36 Stockholm (SE).  <b>(74) Agents:</b> LÖVGREN, Tage et al.; Telefonaktiebolaget LM Ericsson, S-126 25 Stockholm (SE).		<b>(81) Designated States:</b> AU, BR, CA, CN, FL, JP, KR, NZ, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> NON-CONTINUOUS TRANSMISSION FOR SEAMLESS HANDOVER IN DS-CDMA SYSTEMS  <div data-bbox="354 1066 1112 1260"><p>The diagram illustrates a frame structure for non-continuous transmission. A horizontal bar is divided into six segments labeled 'INFO', 'IDLE', 'INFO', 'IDLE', 'INFO', and 'INFO'. Above the second 'IDLE' segment, a double-headed arrow indicates a time interval. Below this bar, a graph labeled 'NORMALIZED POWER' on the y-axis shows a series of rectangular pulses. Each pulse corresponds to an 'INFO' frame in the sequence above, while the 'IDLE' frames correspond to zero power.</p></div>		
<b>(57) Abstract</b>  Introduction of discontinuous transmission in CDMA communications techniques is achieved by using a lower spreading ratio, whereby the spread information only fills an information part of a frame in a compressed mode, leaving an idle part of the frame in which to perform other functions, such as evaluation of other frequencies and execution of seamless handover between frequencies.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

## NON-CONTINUOUS TRANSMISSION FOR SEAMLESS HANDOVER IN DS-CDMA SYSTEMS

### FIELD OF INVENTION

The present invention relates to the use of Code Division Multiple  
5 Access (CDMA) communications techniques in cellular radio telephone  
communication systems, and more particularly, to a method and apparatus  
for seamless handover of call links between frequencies by non-continuous  
transmission in a Direct Sequence-Code Division Multiple Access (DS-  
CDMA) communication technique.

### 10 BACKGROUND OF THE INVENTION

CDMA or spread spectrum communications have been in existence  
since the days of World War II. Early applications were predominantly  
military oriented. However, today there has been an increasing interest in  
using spread spectrum systems in commercial applications. Some examples  
15 include digital cellular radio, land mobile radio, satellite systems, and indoor  
and outdoor personal communication networks referred to herein collectively  
as cellular systems.

Currently, channel access in cellular systems is achieved using  
Frequency Division Multiple Access (FDMA) and Time Division Multiple  
20 Access (TDMA) methods. In FDMA, a communication channel is a single  
radio frequency band into which a signal's transmission power is  
concentrated. Interference with adjacent channels is limited by the use of  
band pass filters which only pass signal energy within the specified  
frequency band. Thus, with each channel being assigned a different  
25 frequency, system capacity is limited by the available frequencies as well as  
by limitations imposed by channel reuse.

In TDMA systems, a channel consists of a time slot in a periodic  
train of time intervals over the same frequency. Each period of time slots is

- 2 -

called a frame. A given signal's energy is confined to one of these time slots. Adjacent channel interference is limited by the use of a time gate or other synchronization element that only passes signal energy received at the proper time. Thus, the problem of interference from different relative signal strength levels is reduced.

With FDMA or TDMA systems or hybrid FDMA/TDMA systems, the goal is to insure that two potentially interfering signals do not occupy the same frequency at the same time. In contrast, Code Division Multiple Access (CDMA) allows signals to overlap in both time and frequency. Thus, CDMA signals share the same frequency spectrum in present day systems. In the frequency or the time domain, the multiple access signals appear to be on top of each other.

There are a number of advantages associated with CDMA communication techniques. The capacity limits of CDMA-based cellular systems are projected to be several times that of existing analog technology as a result of the properties of a wide band CDMA system, such as improved interference diversity, voice activity gating, and reuse of the same spectrum in interference diversity.

In principle, in a CDMA system the informational data stream to be transmitted is impressed upon a much higher rate data stream known as a signature sequence. Typically, the signature sequence data are binary, providing a bit stream. One way to generate this signature sequence is with a pseudo-noise (PN) process that appears random, but can be replicated by an authorized receiver. The informational data stream and the high bit rate signature sequence stream are combined by multiplying the two bit streams together, assuming the binary values of the two bit streams are represented by +1 or -1. This combination of the higher bit rate signal with the lower bit rate data stream is called spreading the informational data stream signal. Each informational data stream or channel is allocated a unique spreading

- 3 -

code (signature sequence). The ratio between the signature sequence bit rate and the information bit rate is called the spreading ratio.

A plurality of coded information signals modulate a radio frequency carrier, for example by quadrature phase shift keying (QPSK), and are jointly received as a composite signal at a receiver. Each of the coded signals overlaps all of the other coded signals, as well as noise-related signals, in both frequency and time. If the receiver is authorized, then the composite signal is correlated with one of the unique codes, and the corresponding information signal can be isolated and decoded.

One CDMA technique, here called "traditional CDMA with direct spreading", uses a signature sequence to represent one bit of information. Receiving the transmitted sequence or its complement (the transmitted binary sequence values) indicates whether the information bit is a "0" or "1". The signature sequence usually comprises N bits, and each bit is called a "chip". The entire N-chip sequence, or its complement, is referred to as a transmitted symbol. The receiver correlates the received signal with the known signature sequence of its own signature sequence generator to produce a normalized value ranging from -1 to +1. When a large positive correlation results, a "0" is detected; when a large negative correlation results, a "1" is detected.

Another CDMA technique, here called "CDMA with direct spreading" allows each transmitted sequence to represent more than one bit of information. A set of code words, typically orthogonal code words or bi-orthogonal code words, is used to code a group of information bits into a much longer code sequence or code symbol. A signature sequence or scramble mask is modulo-2 added to the binary code sequence before transmission. At the receiver, the known scramble mask is used to descramble the received signal, which is then correlated to all possible code words. The code word with the largest correlation value indicates which code word was most likely sent, indicating which information bits were most

- 4 -

likely sent. One common orthogonal code is the Walsh-Hadamard (WH) code.

In CDMA, also referred to as direct sequence CDMA (DS-CDMA) to distinguish it from frequency hopping CDMA, the "information bits" referred to above can also be coded bits, where the code used is a block or convolutional code. One or more information bits can form a data symbol. Also, the signature sequence or scramble mask can be much longer than a single code sequence, in which case a sub-sequence of the signature sequence or scramble mask is added to the code sequence.

For future cellular systems, the use of hierarchical cell structures will prove valuable in even further increasing system capacity. In this cell structure, part of the wave-band of a larger cell or macro cell is devoted to smaller cells or micro cells existing within the macro cell. For instance, micro cell base stations can be placed at a lamp post level along urban streets to handle the increased traffic level in congested areas. Each micro cell might cover several blocks of a street or a tunnel, for instance. Even in CDMA systems, the different types of cells (macro and micro) would or will operate at different frequencies so as to increase the capacity of the overall system. See, H. Eriksson et al., "Multiple Access Options For Cellular Based Personal Comm.," Proc. 43rd Vehic. Tech. Soc. Conf., Secaucus, 1993. Reliable handover procedures must be supported between the different cell types, and thus between different frequencies.

In a cellular communication system such as disclosed in U.S. Patent No. 5,101,501 to Gilhousen et al. (herein incorporated by reference), reliable handover between base stations is viable if the carrier frequency is not changed. The procedure used is called soft handover through macro-diversity, whereby the mobile station is connected to more than one base station simultaneously.

In this conventional CDMA cellular telephone system, each cell has several modulator-demodulator units or spread spectrum mediums. Each

- 5 -

modem consists of a digital spread spectrum transmit modulator, at least one digital spread spectrum data receiver and a searcher receiver. Each modem at the base station can be assigned to a mobile station as needed to facilitate communications with the assigned mobile station. In many instances many  
5 modems are available for use while other ones may be active in communicating with respective mobile stations. In the Gilhousen system a handoff scheme is employed for a CDMA cellular telephone system in which a new base station modem is assigned to a mobile station while the old base station continues to service the call. When the mobile station is located in  
10 the transition region between the two base stations, it communicates with both base stations.

When mobile station communications are established with the new base station, e.g., the mobile station has good communications with the new cell, the old base station discontinues servicing the call. This soft handoff is  
15 in essence a make-before-break switching function. The mobile station determines the best new base station to which communications are to be transferred to from an old base station. Although it is preferred that the mobile station initiate the handoff request and determine the new base station, handoff process decisions may be made as in conventional cellular  
20 telephone systems wherein the base station determines when a handoff may be appropriate and, via the system controller, request neighboring cells to search for the mobile station signal. The base station receiving the strongest signal as determined by the system controller then accepts the handoff.

In the CDMA cellular telephone system, each base station normally  
25 transmits a "pilot carrier" signal. This pilot signal is used by the mobile stations to obtain initial system synchronization and to provide robust time, frequency and phase tracking of the base station transmitted signals.

In conventional DS-CDMA systems the mobile station is continuously occupied with receiving information from the network. In fact, DS-CDMA  
30 normally uses continuous reception and transmission in both link directions.



- 6 -

Unlike TDMA, there are no idle time slots available to switch to other carrier frequencies, creating two problems related to handover between frequencies.

5 The first is reliable handover evaluation, i.e., the procedure of deciding whether to handover to a given base station on a given frequency is appropriate at a particular instant. Since the mobile station can not provide any inter-frequency measurements to a handover evaluation algorithm in the network or the mobile station, the handover decision will be made without full knowledge of the situation of the mobile station, and therefore can be  
10 unreliable.

The second problem is the handover execution. When a decision has been made to handover a call to another base station on another carrier frequency, the mobile station must drop the existing link (or links when the system is operating with macro-diversity), switch to the new carrier  
15 frequency, and initiate a new link. When the mobile station and the new base station are establishing synchronization, information will be lost and the call quality will degrade.

These problems could be solved by implementing two receivers in the mobile station, but this would involve an undesirable increase the amount of  
20 RF hardware needed.

#### SUMMARY OF THE INVENTION

To solve the problems outlined above, the present invention introduces discontinuous transmission into CDMA communications techniques. This is achieved by using a compressed mode wherein a lower  
25 spreading ratio is used such that the spread information only fills a part of a frame, referred to as the information part herein (also referred to herein as a first part). The information is compressed into the information part of the frame in this compressed mode, leaving a part of the frame, referred to herein as an idle part (also referred to as a second part herein), in which to

- 7 -

perform other functions, such as evaluation of other frequencies and execution of seamless handover wherein a user does not detect the handover.

The use of normal and compressed mode frames provides the ability to exploit the advantages of slotted transmission/reception in hierarchical cell structures while using DS-CDMA. It is possible to measure on other carrier frequencies, thereby providing reliable handover decisions. Further, handover execution between carrier frequencies can be made seamless by establishing a new link before releasing the old one. This can be done without the need of two receivers.

#### 10                    BRIEF DESCRIPTION OF THE DRAWING

The features and advantages of the present invention will become apparent from the detailed description set forth below when taken in conjunction with the drawings, in which:

Figure 1 is a schematic representation of communication links in a portion of a cellular communications system;

Figures 2A and 2B are examples of a normal mode transmission and a compressed mode transmission, respectively, during four frames; and

Figure 3 is a block diagram of pertinent parts of the receiver and transmitter structure of the mobile and base stations.

#### 20                    DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Figure 1 illustrates a small portion of a cellular communications system including a mobile station MS and a first base station BS1 and a second base station BS2. In a practical system, there is a multiplicity of mobile stations and many base stations. The base stations BS1 and BS2 are interconnected by land lines T<sub>1</sub> and T<sub>2</sub> to a radio network controller RNC. The radio network controller RNC may include several layers of hierarchical structure, such as a mobile switching center (MSC) and base station controller.

- 8 -

Normally in CDMA systems, information is transmitted in a structure of frames with fixed length, e.g., 5-20 ms. Information to be transmitted within a frame is coded and spread together. The maximum allowable spreading ratio is conventionally used, resulting in continuous transmission during the whole frame, such as shown in Figure 2A. Full frame transmission is denoted the normal mode transmission herein.

The present invention introduces discontinuous transmission into CDMA systems for, e.g., reliable handover evaluation and execution. This is achieved by using a lower spreading ratio, whereby the spread information only fills an information part of a frame in a compressed mode, leaving a residual, idle part idle in which no power is transmitted, as shown in Figure 2B.

In the inventive method, this slotted code division multiple access communication technique impresses an informational data stream to be transmitted at a higher rate data signature sequence to produce coded information signals. The coded information signals are transmitted on a channel according to a frame structure comprising frames, each frame being of a specific time duration (e.g., 5-20 ms). In contrast to previous CDMA techniques, the coded information signal is transmitted discontinuously in the compressed mode wherein the frame includes an information part containing the coded information signal and an idle part wherein the coded information signal is not transmitted.

The evaluation of other carrier frequencies for basing handover decisions is easily performed by using the compressed mode in the down-link from a base station to a mobile station on a regular, predetermined basis. After switching to another frequency, the evaluation of the other carrier frequency can be carried out in any suitable fashion, e.g., such as disclosed in U.S. Patent No. 5,175,867 to Wejke et al. The mobile station MS performs measurements in the down-link (MAHO) and the evaluation can be

- 9 -

performed in the mobile station MS and/or the radio network controller RNC.

The mobile station MS performs measurements on other carrier frequencies during the idle part of the compressed mode frame since during  
5 this time it is not required to listen to the base station to which it is currently linked. The measurements are relayed to the radio network controller RNC (through the currently linked base station or base stations), providing the means for mobile assisted handover (MAHO). The mobile assisted handover may be otherwise done in a manner derived from the teachings of U.S.  
10 Patent Nos. 5,175,867 or 5,042,082, or other suitable MAHO technique.

The compressed mode is used intermittently at a rate determined by the radio network controller RNC in the preferred embodiment. The radio network controller RNC can determine the frequency of use of the compressed mode based on a variety of factors, such as the radio  
15 propagation conditions, the mobile station MS speed, interference factors (e.g., interference load) the relative call density, and the proximity to cell borders where handover is more likely to be needed. Most frames still use normal mode transmission in typical situations.

Execution of a call handover is also handled in the compressed mode  
20 in a preferred embodiment of the present invention. After deciding on handover to a new base station broadcasting on another carrier frequency, the compressed mode is entered. Communication with the old base station(s) is maintained while establishing a new link during the idle part of the frame. Thereby complete synchronization with the new base station is obtained,  
25 establishing a new link. The handover is completed by dropping the old link(s) and returning to normal mode transmission. By keeping the old link(s) also after the new link is synchronized, communication to the new and the old base stations simultaneously can be employed (establishing macro-diversity on two carrier frequencies) making the scheme a make-

- 10 -

before-break method. This scheme for seamless inter-frequency handover can be used for both up- and down-links.

The duty cycle is the ratio of the information part of a frame to the frame duration and is controlled on a frame by frame basis. For  
5 measurements on other frequencies, the duty cycle can remain relatively high (e.g., 0.8) since only a short period of time is needed for the measurement. For execution of macro diversity between two frequencies, the same information is sent on both. Therefore, the duty cycle should be approximately 0.5. The compressed mode is used only intermittently and the  
10 normal mode (duty cycle = 1) is used the remainder of the time because it is more efficient due to the larger spreading ratio. The radio network controller RNC controls the compressed mode scheme for each individual connection in a preferred embodiment.

The duty cycle can be varied according to the requirements for  
15 obtaining synchronization of the link between the mobile station MS and the base station BS. However, if simultaneous communication (macro-diversity) is used, a duty cycle of about 50% is preferred. In this way, the communication channels to the two BS are of equal duty cycle.

To control the transmission quality, the transmission power used  
20 during the information part of the frame is a function of the duty cycle, in the preferred embodiment of the present invention. For example,

$$P = \frac{P_1}{\text{Duty Cycle}} \quad [W]$$

wherein  $P_1$  = power used for normal mode transmission.

25 This increased power is needed to maintain transmission quality in the detector if the duty cycle and thus the spreading ratio is reduced. During the rest of the frame, i.e., the idle part, the power is turned off when the compressed mode is used for measuring other carrier frequencies, for example.

- 11 -

The variation in total transmitted power from a base station BS can be smoothed by staggering (spreading in time) the deployment of compressed mode over a number of users in a certain time span. Since signal strength measurement on another carrier frequency is likely to require only a fraction of a frame, the duty cycle can be made high, thereby reducing the variation in the power transmission.

If the mobile station MS is in macro-diversity mode, i.e., the mobile station MS is connected to more than one base station, it is necessary that all connected base stations BS1 and BS2 employ the same transmission mode and duty cycle for any given frame. Macro-diversity may be used to improve call quality, as well as for call handover. This synchronization can be achieved in any suitable fashion, and in a preferred embodiment it is achieved through the radio network controller RNC connecting the base stations BS1 and BS2. For instance, the synchronization can be achieved as taught in U.S. Patent Application No. 08/075,893 to Teder et al. filed concurrently herewith.

The present invention can be implemented in any suitable system such as illustrated in Figure 3. The same basic type of transmitter and receiver can be used in both the mobile station MS and the base station BS. On the transmitter side 30, information data is input to a spreading and framing unit 31 wherein the information is slotted coded according to the DS-CDMA technique of the present invention. The spread and framed data is then transferred to a transmitter 32 and thereafter transmitted. The duty cycle and the frame timing are controlled by a mode controller 33 in accordance with the above method. The duty cycle of the relative power of the carrier frequency is also controlled by the mode controller 33 as described above. The mode controller 33 is controlled according to a measurement/handover algorithm. This algorithm can be implemented through software in either the mobile station MS or in the radio network controller RNC, or both, as a given situation makes advantageous.

- 12 -

On the receiver side 35, the mode controller 36 controls the duty cycle of the carrier frequency or frequencies and the frame timing of a radio frequency receiver 37. The radio frequency receiver 37 receives an incoming radio signal and demodulates it according to the duty cycle as controlled by the mode controller 36. The demodulated signal is input to an information decoder 38 the duty cycle and frame timing of which is controlled by the mode controller 36. The mobile station MS also includes a decoder 39 for channels having fixed spreading such as the pilot channel on which measurement of the signal strength of neighboring base stations BS is carried out. The mode controller 36 controls the duty cycle, frame timing (which part of the frame is active), a carrier frequency (or frequencies in the receiver, if receiving from two different frequencies) and the relative power level.

The decision to enter the compressed mode can be made by using the algorithm in the radio network controller RNC. Alternatively, the network may command that every down-link frame should be in the compressed mode, and this command is communicated to the mobile stations MS. Other methods of governing when the compressed mode is used can be easily envisioned.

The present invention's use of normal and compressed mode frames provides the ability to exploit the advantages of slotted transmission/reception in hierarchical cell structures (see also the aforementioned article by H. Eriksson et al) while using DS-CDMA. It is possible to measure other carrier frequencies, thereby providing reliable handover decisions. Further, handover execution between carrier frequencies can be made seamless by establishing a new link before releasing the old one. This can be done without the need for two receivers.

The preceding description of the preferred embodiments are provided to enable any person skilled in the art to make and use the present invention. Various modifications to these embodiments will be readily apparent to those

- 13 -

skilled in the art, and the principles described herein may be applied without departing from the scope and spirit of the present invention. Thus, the present invention is not limited to the disclosed embodiment, but is to be accorded the widest scope consistent with the claim below.



- 14 -

What is claimed is:

1. A method of code division multiple access in cellular communications, said method comprising steps of:  
    impressing an informational data stream to be transmitted on a higher rate data signature sequence to produce a coded information signal;  
    and  
    transmitting said coded information signal on a channel according to a frame structure comprising frames, each frame having a specific time duration,  
    said transmitting step includes intermittently transmitting said coded information signal in a compressed mode, using a lower spreading ratio, wherein a frame transmitted in said compressed mode includes a first part having a time duration less than said specific time duration and containing a complete coded information signal, and a second part.
2. A method according to claim 1, comprising a further step of increasing a transmission power level used during a first part of a compressed mode frame as a function of a duty cycle, defined as a ratio of the time duration of said first part to said specific time duration, of said compressed mode frame.
3. A method in accordance with claim 1, wherein no power is transmitted during said second part.
4. A method according to claim 1, wherein said compressed mode is used in one radio link without coordination with use of compressed mode in other radio links.

- 15 -

5. A method according to claim 2, further comprising the step of smoothing variations in total transmitted power by spreading in time use of compressed mode frames over a number of users in a determined time span.

6. A method according to claim 1, wherein a frequency of use of said compressed mode is based on one or a combination of one or more of the following factors: mobile station speed, interference load, relative call density, and proximity to cell boarders.

7. A method according to claim 1, wherein the compressed mode is used in a down-link.

8. A method according to claim 1, wherein the compressed mode is used in both a down-link and an up-link.

9. A method according to claim 1, wherein the compressed mode is used in an up-link.

10. A method according to claim 7, comprising the further step of performing measurements, in a mobile station, of carrier frequencies during a second part of a down-link compressed mode frame.

11. A method according to claim 8, comprising the further step of performing measurements, in a mobile station, of carrier frequencies during a second part of a down-link compressed mode frame.

12. A method according to claim 8, comprising the further step of utilizing said compressed mode when synchronizing on a new carrier frequency and establishing a new radio link during said second part of a compressed mode frame.

- 16 -

13. A method according to claim 12, comprising the further step of maintaining communication on both a presently used radio link and said new radio link, using said second part of a compressed mode frame for communicating on said new radio link.

14. A method according to claim 13, comprising the further step of dropping said presently used radio link and returning to a normal mode frame transmission, wherein a normal mode frame consists of only said coded information during the entirety of said specific time duration.

15. A method according to claim 11, comprising the further steps of utilizing said compressed mode when synchronizing communication on a new carrier frequency and establishing a new radio link during said second part of a compressed mode frame.

16. A method according to claim 15, comprising the further step of maintaining communication on both a presently used radio link and said new radio link using said second part of a compressed mode frame for communicating on said new radio link.

17. A method according to claim 16, comprising the further steps of dropping said presently used radio link and returning to normal mode frame transmission, wherein a normal mode frame consists of only said coded information during the entirety of said specific time duration.

18. A method according to claim 10, comprising the further step of performing handover evaluation using said measurements of a carrier frequency differing in frequency from a carrier frequency upon which a present link is established.

- 17 -

19. A method according to claim 11, comprising the further step of performing handover evaluation using said measurements of a carrier frequency differing in frequency from a carrier frequency upon which a present link is established.

20. A method according to claim 19, comprising the further steps of utilizing said compressed mode when synchronizing communication on a new carrier frequency and establishing a new link, based on said handover evaluation, during said second part of a compressed mode frame.

21. A method according to claim 20, comprising the further step of maintaining communication on both a presently used radio link and said new radio link, using said second part of a compressed mode frame for communicating on said new radio link.

22. A method according to claim 21, comprising the further steps of dropping said presently used radio link and returning to a normal mode frame transmission, wherein a normal mode frame consists of only said coded information during the entirety of said specific time duration.

23. A method according to claim 8, comprising the further step of utilizing said compressed mode when executing seamless handover by performing communications on a present radio link during said first part,  
synchronizing communication on a new carrier frequency during said second part,  
establishing a new radio link during said second part,  
dropping the present link when communication on said new radio link has been established, and

- 18 -

performing communications on the new radio link using a normal mode transmission, wherein a normal mode frame consists of only said coded information during the entirety of said specific time duration.

24. A method according to claim 11, comprising the further step of utilizing said compressed mode when executing seamless handover by performing communications on a present radio link during said first part,

synchronizing communications on a new carrier frequency during said second part,

establishing a new radio link during said second part,

dropping the present link when communication on said new radio link has been established, and

performing communications on the new radio link using a normal mode transmission, wherein a normal mode frame consists of only said coded information during the entirety of said specific time duration.

25. A method according to claim 19, comprising the further steps of utilizing said compressed mode when executing seamless handover by performing communications on a present link during said first part, selecting a new carrier frequency based on said handover evaluation, synchronizing communication on said new carrier frequency during said second part,

establishing a new radio link during said second part,

dropping the present link when communication on said new radio link has been established, and

performing communications on the new radio link using a normal mode transmission, wherein a normal mode frame consists of only said coded information during the entirety of said specific time duration.

- 19 -

26. An apparatus for transmitting information in a code division multiple access system transmitting information in frames of specific time duration, said apparatus comprising:

means for spreading and framing data in either a normal mode, wherein a normal mode frame consists of only said coded information during the entirety of said specific time duration, or, a compressed mode, wherein frames include a first part of less than said specific time duration, said first part containing a complete coded information signal, and a second part, said spreading and framing means including an input and an output;

means for controlling which of said compressed mode and said normal mode is used in said spreading and framing means; and

means for transmitting said coded information signal output of said spreading and framing means.

27. The apparatus according to claim 26, further comprising:

means for receiving radio frequencies;

an information decoder, operatively connected to said means for receiving, capable of decoding information in accordance with said compressed mode and said normal mode; and

means, operatively connected to said information decoder, for controlling which of the compressed mode and the normal mode is used in said information decoder.

28. The apparatus according to claim 27, wherein said mode control means selects a mode according to a measurement/handover algorithm.

29. The apparatus according to claim 26, wherein said apparatus forms part of a mobile station.

- 20 -

30. The apparatus according to claim 29, further comprising means for decoding channels with fixed spreading ratios.

31. The apparatus according to claim 26, wherein said apparatus is part of a base station.

32. The apparatus according to claim 28, wherein part of said algorithm is implemented in a mobile station and part of said algorithm is implemented in a base station.

33. The apparatus according to claim 26, wherein one of said apparatus is located in a mobile station and another of said apparatus is located in a base station.

34. The apparatus according to claim 26, wherein power supplied to said means for transmitting during a first part of a frame is controlled by said mode control means.

35. The apparatus according to claim 27, wherein frame timing of said receiver means is controlled by said mode control means.

36. The apparatus according to claim 28, wherein a duty cycle of the compressed mode frame of said receiver means is controlled by said mode control means.

37. A method of code division multiple access in cellular communications, said method comprising steps of:

impressing an informational data stream to be transmitted on a higher rate data signature sequence to produce a coded information signal;  
and

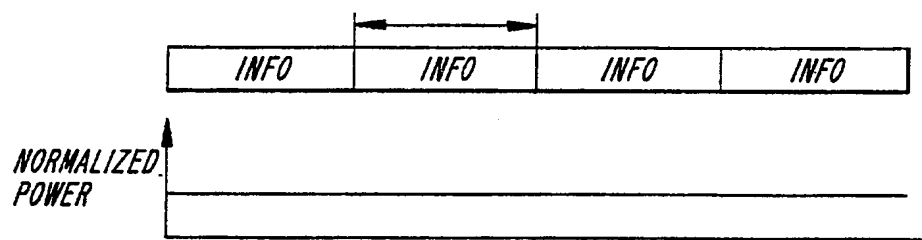
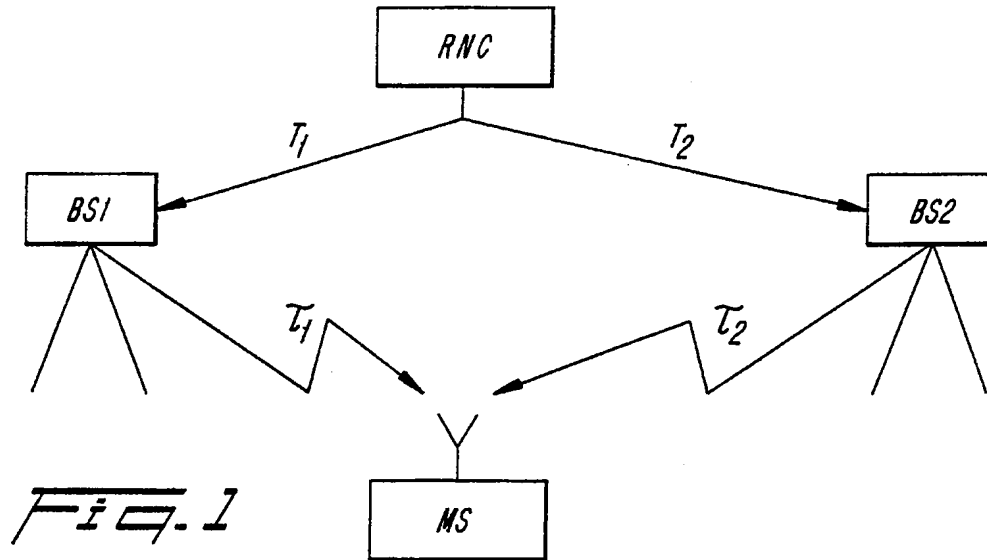
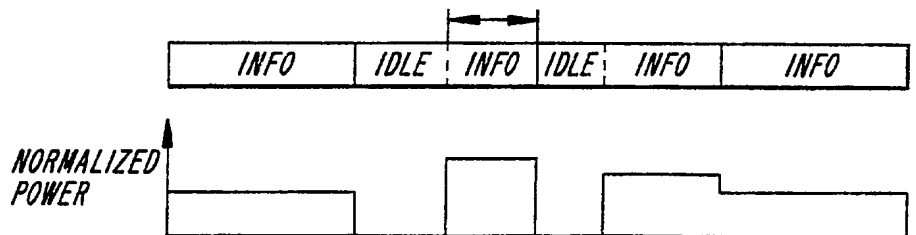
- 21 -

transmitting said coded information signal on a channel according to a frame structure comprising frames, each frame having a specific time duration,

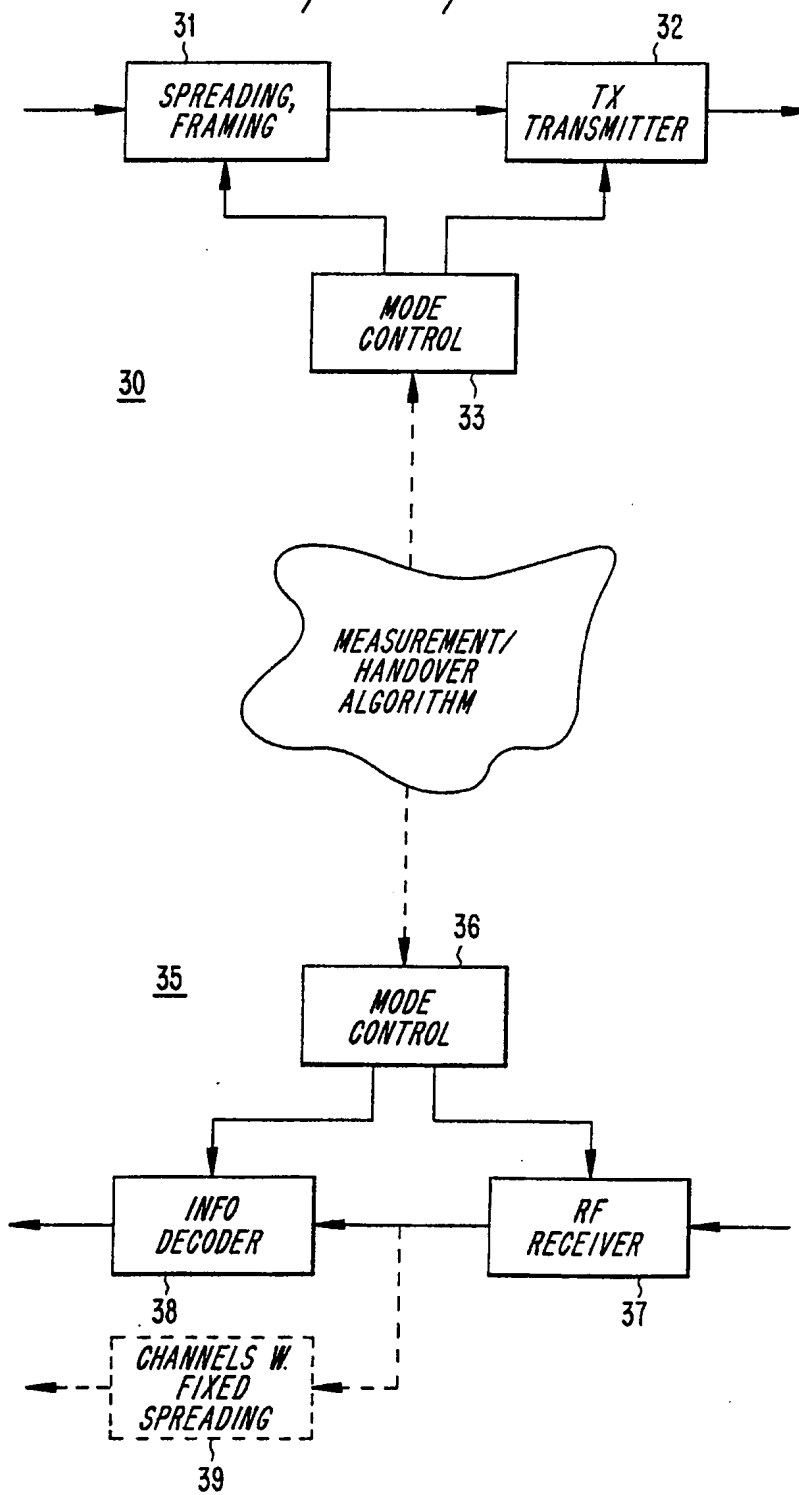
said transmitting step includes transmitting said coded information signal in a compressed mode, using a lower spreading ratio, wherein said compressed mode frame includes a first part containing all of said coded information signal and a second part.



1/2

*Fig. 2A**Fig. 2B*

SUBSTITUTE SHEET

*FIG. 3*

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 94/00583

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
<sup>5</sup> <b>IPC : H04J 13/00, H04Q 7/04</b> According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols)		
<b>IPC <sup>5</sup>: H04J, H04B, H04Q</b>		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
<b>SE,DK,FI,NO classes as above</b>		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	Patent Abstracts of Japan, Vol 13, No 166, E-746, abstract of JP, A, 63-318837 (MITSUBISHI ELECTRIC CORP), 27 December 1988 (27.12.88)	1,28,36,37
A	--	26
Y	IEEE Vehicular Technology Conference, Volume 43, May 1993, (USA), Håkan Eriksson et al, "Multiple Access Options for Cellular Based Personal Communications", see paragraph 5.4.4	1,28,36,37
A	--	
A	Patent Abstracts of Japan, Vol 17, No 456, E-1418, abstract of JP, A, 51-2943 (NIPPON TELEGR & TELEPH CORP), 23 April 1993 (23.04.93)	1-3,34,35
	--	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
26 Sept 1994		27 -09- 1994
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer  Bengt Jonsson Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 94/00583

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	US, A, 5239557 (PAUL W. DENT), 24 August 1993 (24.08.93), column 8, line 59 - column 9, line 18, abstract  --	1-37
P,A	US, A, 5274667 (DAVID OLMSTEAD), 28 December 1993 (28.12.93), abstract  -- -----	1-37

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

27/08/94

International application No.

PCT/SE 94/00583

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US-A-	5239557	24/08/93	AU-A-	4101593	18/11/93
			CA-A-	2110999	28/10/93
			EP-A-	0565504	13/10/93
			FI-A,D-	935524	09/02/94
			WO-A-	9321707	28/10/93
US-A-	5274667	28/12/93	CA-A-	2103744	24/04/94
			EP-A-	0594325	27/04/94
			US-A-	5335247	02/08/94